



# POWERTIP CORPORATION

## SPECIFICATIONS



**CUSTOMER** : OKAYA(A)

**SAMPLE CODE** : \_\_\_\_\_  
(This Code will be changed while mass production)

**MASS PRODUCTION CODE** : PC2004WRM-AWA-F  
**(VER:0)**

**Customer Approved**

**Date:**

Sales Sign	QC Confirmed	Checked By	Designer
		 2004/08/21	 2004/08/21

Approval For Specifications Only.

\* This specification is subject to change without notice.

Please contact Powertip or it's representative before designing your product based on this specification.

Approval For Specifications and Sample.

### PowerTip Corporation

*Headquarters:*

No.8, 6<sup>th</sup> Road, Taichung Industrial Park,  
 Taichung, Taiwan  
 台中市 407 工業區六路 8 號

LCD Division:

TEL: 886-4-2355-6888

FAX: 886-4-2355-6898

E-mail: [sales@powertip.com.tw](mailto:sales@powertip.com.tw)

[Http://www.powertip.com.tw](http://www.powertip.com.tw)

LCM Division:

TEL: 886-4-2355-8168

FAX: 886-4-2355-8166

E-mail: [sales@powertip.com.tw](mailto:sales@powertip.com.tw)

[Http://www.powertip.com.tw](http://www.powertip.com.tw)

**RECORDS OF REVISION**

Date	Rev.	Description	Note	Page
2004/08/16	0	Revised contents		

Total : 22Page

## Contents

### 1. SPECIFICATIONS

- 1.1 Features
- 1.2 Mechanical Specifications
- 1.3 Absolute Maximum Ratings
- 1.4 DC Electrical Characteristics
- 1.5 Optical Characteristics
- 1.6 Backlight Characteristics

### 2. MODULE STRUCTURE

- 2.1 Counter Drawing
- 2.2 Interface Pin Description
- 2.3 Timing Characteristics
- 2.4 Display Command
- 2.5 Character Pattern

### 3. QUALITY ASSURANCE SYSTEM

- 3.1 Quality Assurance Flow Chart
- 3.2 Inspection Specification

### 4. RELIABILITY TEST

- 4.1 Reliability Test Condition

### 5. PRECAUTION RELATING PRODUCT HANDLING

- 5.1 Safety
- 5.2 Handling
- 5.3 Storage
- 5.4 Terms of Warranty

Note : For detailed information please refer to IC data sheet : [ST7066U,KS0063B](#)

## 1. SPECIFICATIONS

### 1.1 Features

Item	Standard Value
Display Type	20 * 4 characters
LCD Type	STN,Blue, Transmissive, Negative, Normal Temp.
Driver Condition	1/16duty , 1/4 Bias
Viewing Direction	12 O'clock
Backlight	White LED B/L
Weight	72.0g
Interface	
Other	

### 1.2 Mechanical Specifications

Item	Standard Value	Unit
Outline Dimension	98.0(L)* 60.0(W)*13.3(H)max	mm
Viewing Area	76.0(L)*25.2(W)	mm
Active Area	70.4(L)*20.8(W)	mm
Dot Size	0.55(L)*0.55(W)	mm
Dot Pitch	0.6(L)*0.6(W)	mm

Note : For detailed information please refer to LCM drawing

### 1.3 Absolute Maximum Ratings

Item	Symbol	Condition	Min.	Max.	Unit
Power Supply Voltage	$V_{DD}$	—	-0.3	7.0	V
LCD Driver Supply Voltage	$V_{LCD}$	—	$V_{DD}-10.0$	$V_{DD}+0.3$	V
Input Voltage	$V_{IN}$	—	-0.3	$V_{DD}+0.3$	V
Operating Temperature	$T_{OP}$	Excluded B/L	0	50	°C
Storage Temperature	$T_{ST}$		-20	70	°C
Storage Humidity	$H_D$	$T_a < 40\text{ °C}$	-	90	%RH

## 1.4 DC Electrical Characteristics

$V_{DD} = 5.0\text{ V} \pm 10\%$  ,  $V_{SS} = 0\text{V}$  ,  $T_a = 25^\circ\text{C}$

Item	Symbol	Condition	Min.	Typ.	Max.	Unit
Logic Supply Voltage	$V_{DD}$	—	4.5	5.0	5.5	V
“H” Input Voltage	$V_{IH}$	—	$0.7 V_{DD}$	-	$V_{DD}$	V
“L” Input Voltage	$V_{IL}$	—	-0.3	-	0.6	V
“H” Output Voltage	$V_{OH}$	$I_{OH} = -0.205\text{mA}$	3.9	-	$V_{DD}$	V
“L” Output Voltage	$V_{OL}$	$I_{OL} = 1.2\text{mA}$	-	-	0.4	V
Supply Current	$I_{DD}$	$V_{DD} = 5.0\text{ V}$	-	2.5	3.5	mA
LCM Driver Voltage	$V_{OP}$	0°C	-	-	-	V
		25°C*1	-	4.4	-	
		50°C	-	-	-	


Note: \*1. THE  $V_{OP}$  TEST POINT IS  $V_{DD} - V_O$ .

## 1.5 Optical Characteristics


1/16Duty , 1/5Bias ,  $V_{LCD} = 4.3\text{ V}$  ,  $T_a = 25^\circ\text{C}$

Item	Symbol	Conditions	Min.	Typ.	Max.	Reference
View Angle	$\theta$	$C \geq 2.0, \varnothing = 0^\circ$	40°	-	-	Notes 1 & 2
Contrast Ratio	C	$\theta = 5^\circ, \varnothing = 0^\circ$	5	7	-	Note 3
Response Time(rise)	$T_r$	$\theta = 5^\circ, \varnothing = 0^\circ$	-	150 ms	-	Note 4
Response Time(fall)	$T_f$	$\theta = 5^\circ, \varnothing = 0^\circ$	-	300 ms	-	Note 4

Note 1: Definition of angles  $\theta$  and  $\phi$

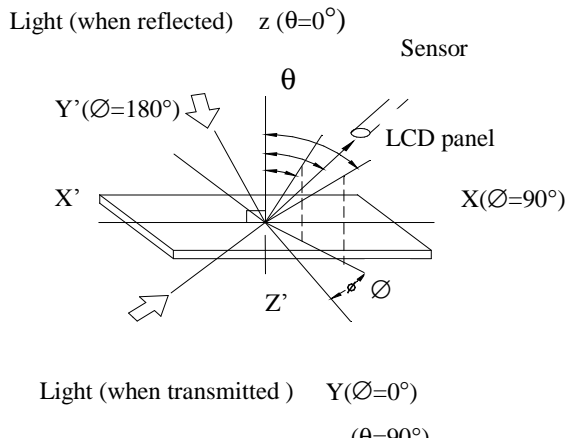


Note 2: Definition of viewing angles  $\theta_1$  and  $\theta_2$

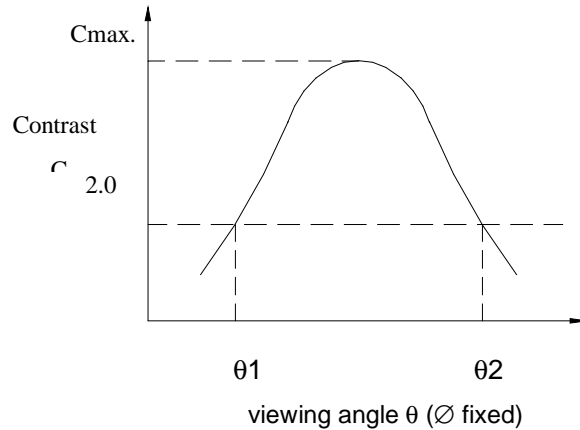


Note : Optimum viewing angle with the naked eye and viewing angle  $\theta$  at  $C_{max}$ . Above are not always the same

Note 3: Definition of contrast C

$$C = \frac{\text{Brightness (reflection) of unselected dot (B2)}}{\text{Brightness (reflection) of selected dot (B1)}}$$

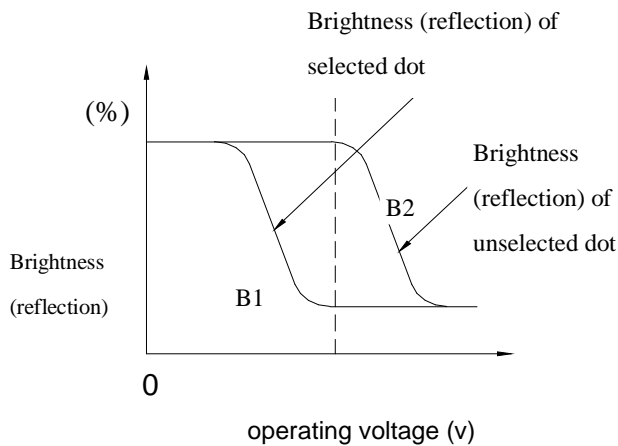

Note 4: Definition of response time

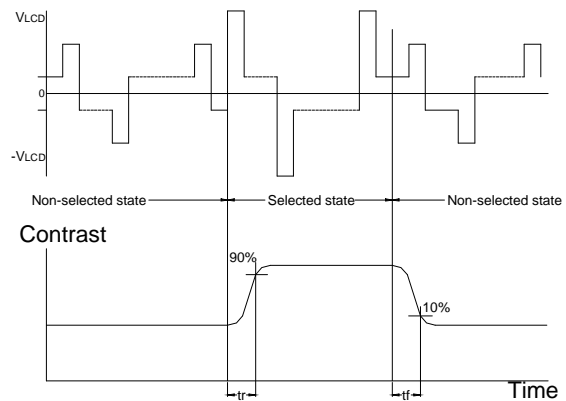

Note: Measured with a transmissive LCD panel which is displayed 1 cm<sup>2</sup>

$V_{LCD}$  : Operating voltage  $f_{FRM}$  : Frame frequency  
 $t_r$  : Response time (rise)  $t_f$  : Response time (fall)

## 1.6 Backlight Characteristics

LCD Module with LED Backlight

### Maximum Ratings


Item	Symbol	Conditions	Min.	Max.	Unit
Forward Current	IF	Ta =25°C	-	72	mA
Reverse Voltage	VR	Ta =25°C	-	5	V
Power Dissipation	PO	Ta =25°C	-	0.29	W
Operating Temperature	T <sub>OP</sub>	-	-20	70	°C
Storage Temperature	T <sub>ST</sub>	-	-30	80	°C
Solder Temp. for 3 Second	-	-	-	260	°C

### Electrical / Optical Characteristics


Ta =25°C

Item	Symbol	Conditions	Min.	Typ.	Max.	Unit
Forward Voltage	VF	IF= 60 mA	3.0	3.3	4.0	V
Reverse Current	IR	VR= 5 V	-	-	0.15	mA
Luminous Intensity (Without LCD)	IV	IF= 60 mA	185	290	-	cd/m <sup>2</sup>
Wavelength	Hue	IF= 60 mA	-	White	-	nm
Color	White					

## 2.1 Counter Drawing

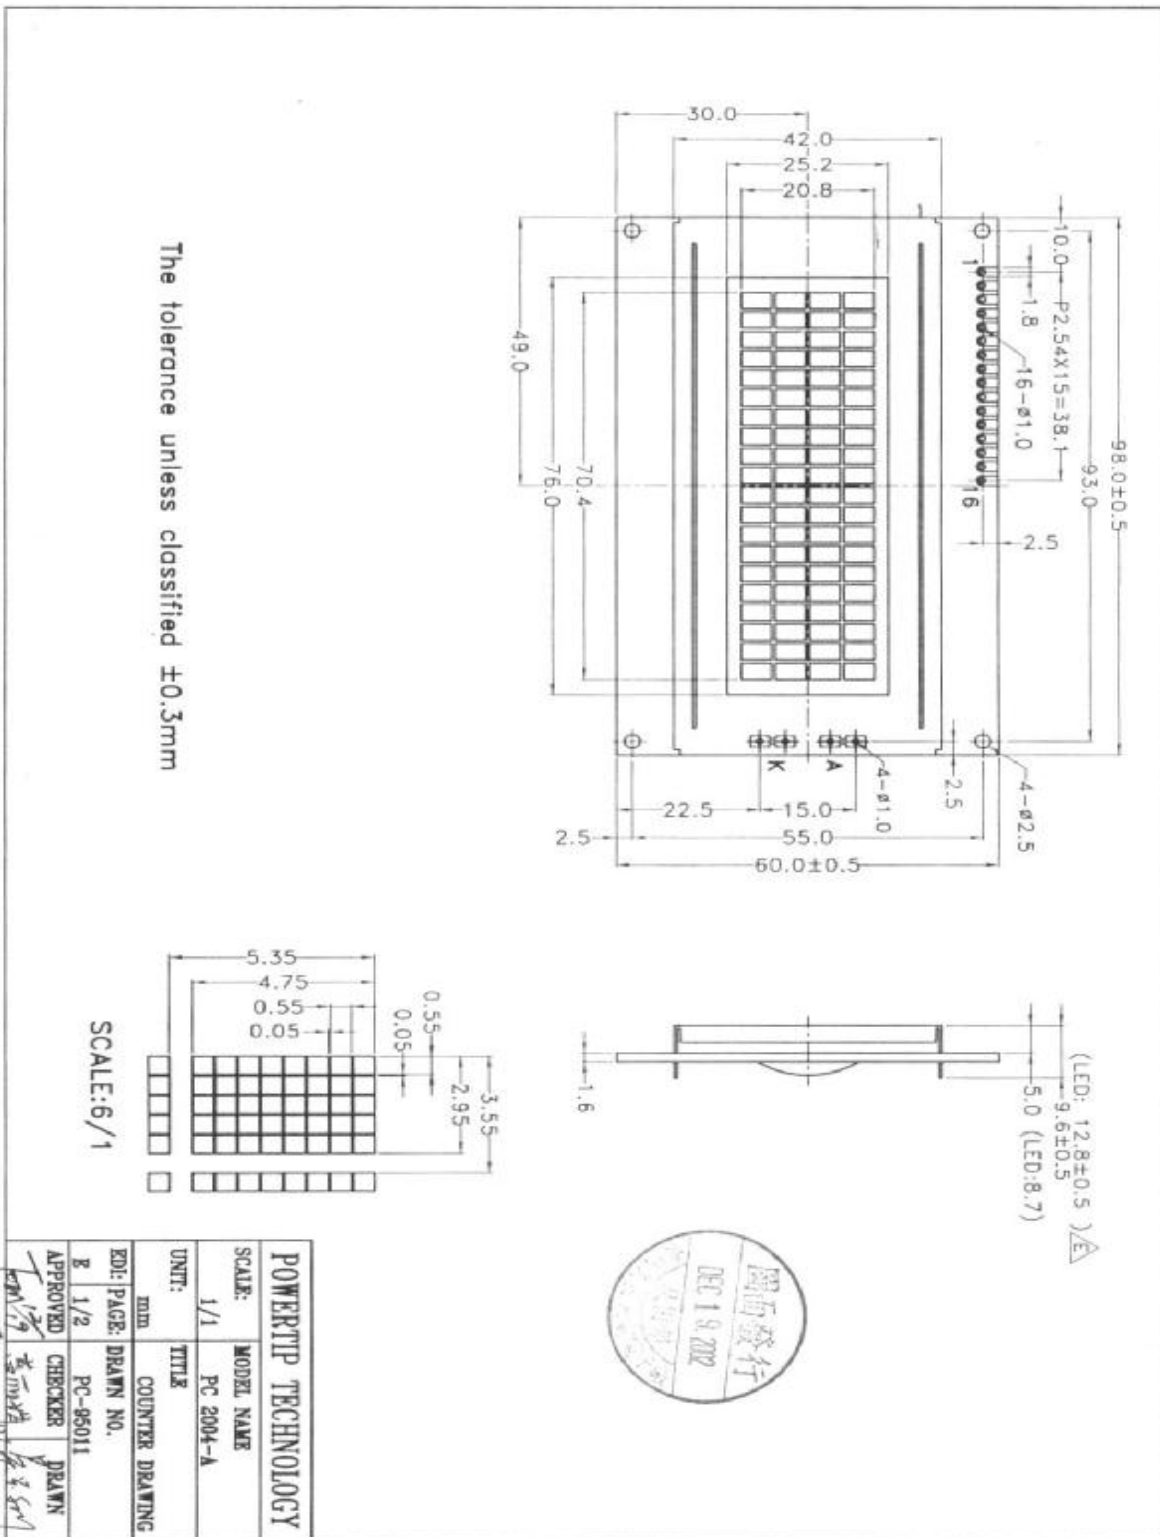



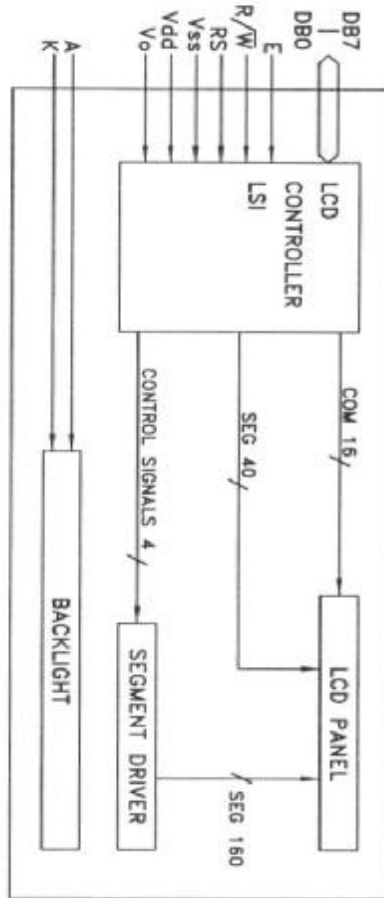

PIN NO.	SIGNAL
1	Vss
2	VDD
3	Vo
4	RS
5	R/W
6	E
7	DB0
8	DB1
9	DB2
10	DB3
11	DB4
12	DB5
13	DB6
14	DB7
15	A
16	K




<b>POWER TIP TECHNOLOGY</b>		
SCALE:	MODEL NAME	
NO SCALE	PC 2004-A	
UNIT:	TITLE	
NO UNIT	COUNTER DRAWING	
EDI: PAGE:	DRAWN NO.	
8 2/2	PC-95011	
APPROVED	CHECKER	DRAWN
<i>[Signature]</i>	<i>[Signature]</i>	<i>[Signature]</i>
<i>[Signature]</i>	<i>[Signature]</i>	<i>[Signature]</i>

## 2.2 Interface Pin Description


Pin No.	Symbol	Signal Description
1	V <sub>SS</sub>	Power Supply (V <sub>SS</sub> =0)
2	V <sub>DD</sub>	Power Supply (V <sub>DD</sub> >V <sub>SS</sub> )
3	V <sub>O</sub>	Operating voltage for LCD
4	RS	Register Selection input High = Data register Low = Instruction register (for write) Busy flag address counter (for read)
5	$\overline{\text{R/W}}$	Read/Write signal input is used to select the read/write mode. High = Read mode, Low = Write mode
6	E	Start enable signal to read or write the data
7~10	DB0 ~ DB3	Four low order bi-directional three-state data bus lines. Use for data transfer between the MPU and the LCD module. These four are not used during 4-bit operation.
11~14	DB4~DB7	Four high order bi-directional three-state data bus lines. Used for data transfer between the MPU and the LCD module. DB7 can be used as a busy flag.
15	A	Power supply for LED B/L (+)
16	K	Power supply for LED B/L (-)

Contrast Adjust

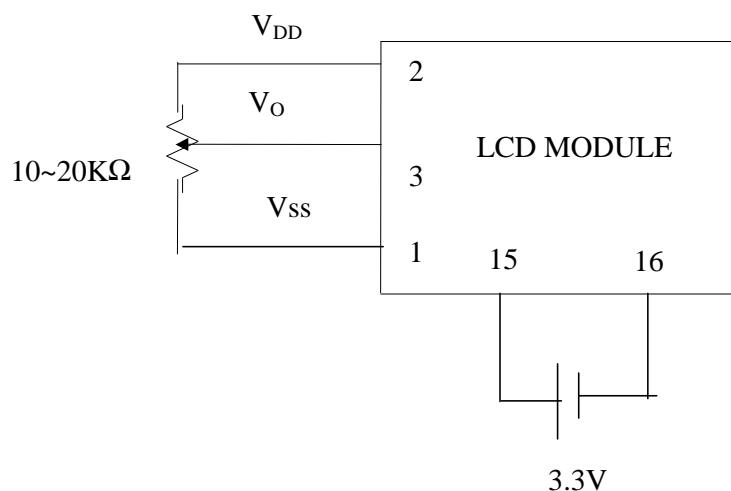


## 2.3 Timing Characteristics

- Writing data from MPU to ST7066U

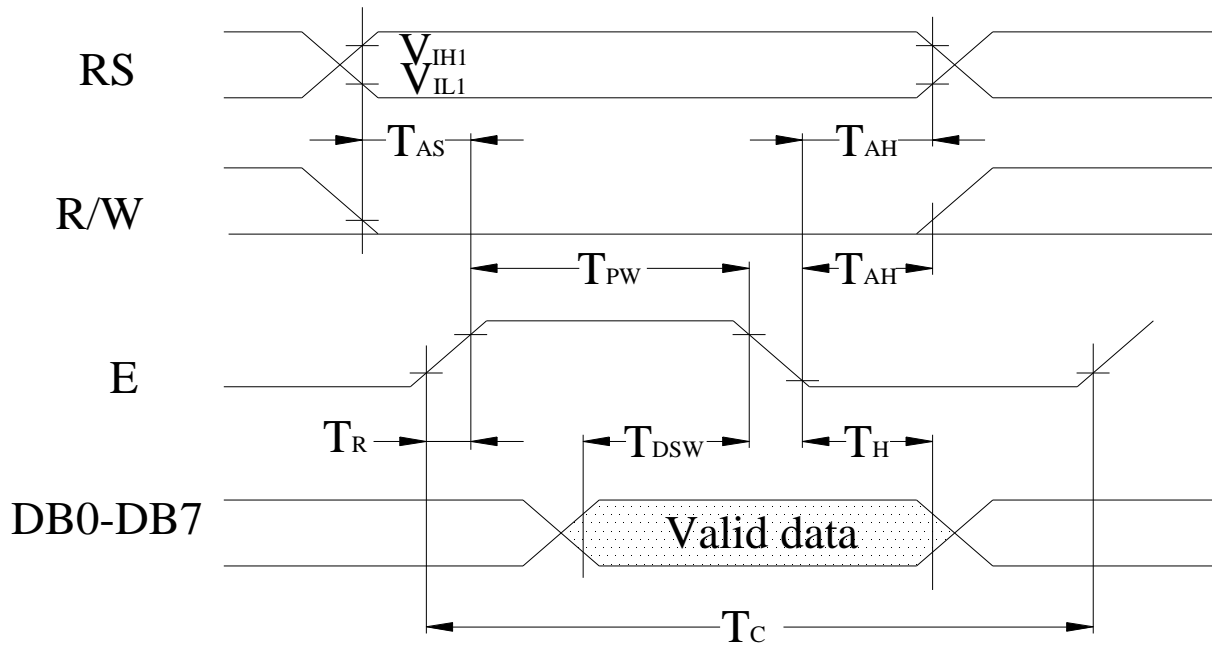

### I Reading data from ST7066U to MPU

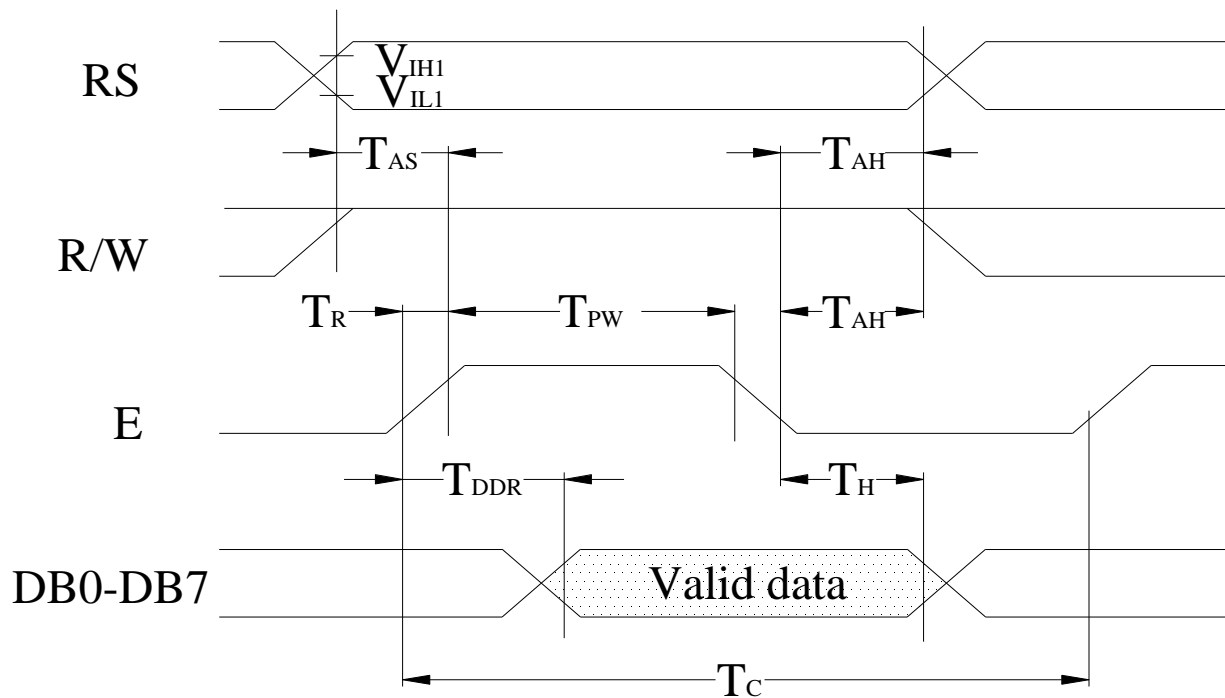

- Write Mode (Writing data from MPU to ST7066U)

(V<sub>cc</sub> = +5V, T<sub>a</sub> = 25°C)

Symbol	Characteristics	Test Condition	Min.	Typ.	Max.	Unit
T <sub>C</sub>	Enable Cycle Time	Pin E	1200	-	-	ns
T <sub>PW</sub>	Enable Pulse Width	Pin E	140	-	-	ns
T <sub>R</sub> , T <sub>F</sub>	Enable Rise / Fall Time	Pin E	-	-	25	ns
T <sub>AS</sub>	Address Setup Time	Pins: RS, RW, E	0	-	-	ns
T <sub>AH</sub>	Address Hold Time	Pins: RS, RW, E	10	-	-	ns
T <sub>DSW</sub>	Data Setup Time	Pins: DB0~DB7	40	-	-	ns
T <sub>H</sub>	Data Hold Time	Pins: DB0~DB7	10	-	-	ns

- Read Mode (Reading data from ST7066U to MPU)

(V<sub>cc</sub> = +5V, T<sub>a</sub> = 25°C)

Symbol	Characteristics	Test Condition	Min.	Typ.	Max.	Unit
T <sub>C</sub>	Enable Cycle Time	Pin E	1200	-	-	ns
T <sub>PW</sub>	Enable Pulse Width	Pin E	140	-	-	ns
T <sub>R</sub> , T <sub>F</sub>	Enable Rise / Fall Time	Pin E	-	-	25	ns
T <sub>AS</sub>	Address Setup Time	Pins: RS, RW, E	0	-	-	ns
T <sub>AH</sub>	Address Hold Time	Pins: RS, RW, E	10	-	-	ns
T <sub>DDR</sub>	Data Setup Time	Pins: DB0~DB7	-	-	100	ns
T <sub>H</sub>	Data Hold Time	Pins: DB0~DB7	10	-	-	ns

## 2.4 Display Command

Instructions	Instruction Code										Description	Description Time (270KHz)	
	RS	R/W	DB 7	DB 6	DB 5	DB 4	DB 3	DB 2	DB 1	DB 0			
Clear Display	0	0	0	0	0	0	0	0	0	0	1	Write "20H" to DDRAM. and set DDRAM address to "00H" from AC.	1.52ms
Return Home	0	0	0	0	0	0	0	0	0	1	×	Set DDRAM address to "00H" from AC and return cursor to it's original position if shifted. The contents of DDRAM are not changed.	1.52ms
Entry Mode Set	0	0	0	0	0	0	0	0	1	I/D	S	Sets cursor move direction and specifies display shift. These operations are performed during data write and read .	37μs
Display ON/OFF	0	0	0	0	0	0	0	1	D	C	B	D=1 : entire display on C=1 : cursor on B=1 : cursor position on	37μs
Cursor or Display Shift	0	0	0	0	0	0	1	S/C	R/L	×	×	Set cursor moving and display shift control bit, and the direction, without changing of DDRAM data.	37μs
Function Set	0	0	0	0	0	1	DL	N	F	×	×	DL: interface data is 8/4 bits NL: number of line is 2/1 F: font size is 5×11/5×8	37μs
Set CGRAM Address	0	0	0	1	AC 5	AC 4	AC 3	AC 2	AC 1	AC 0		Set CGRAM address in address counter.	37μs
Set DDRAM Address	0	0	1	AC 6	AC 5	AC 4	AC 3	AC 2	AC 1	AC 0		Set DDRAM address in address counter.	37μs

Read Busy Flag and Address	0	1	BF	AC 6	AC 5	AC 4	AC 3	AC 2	AC 1	AC 0	Whether during internal operation or not can be known by reading BF. The contents of address counter can also be read.	0 $\mu$ s
Write Data to RAM	1	0	D7	D6	D5	D4	D3	D2	D1	D0	Write data into internal RAM (DDRAM/CGRAM).	37 $\mu$ s
Read Data from RAM	1	1	D7	D6	D5	D4	D3	D2	D1	D0	Read data from internal RAM (DDRAM/CGRAM).	37 $\mu$ s

Note:

Be sure the ST7066U is not in the busy state (BF=0) before sending an instruction from the MPU to the ST7066.

If an instruction is sent without checking the busy flag , the time between the first instruction and next instruction will take much longer than the instruction time itself.

Refer to Instruction Table for the list of each instruction execution time .


## 2.5 Character Pattern

### ■ CHARACTER PATTERN(SO/HO/EA,WA)


Lower 4 Bits \ Upper 4 Bits	0000	0001	0010	0011	0100	0101	0110	0111	1000	1001	1010	1011	1100	1101	1110	1111
xxxx0000	CG RAM (1)			0	1	A	a	P	\	p			-	3	E	EP
xxxx0001	(2)		!	1	A	a	a				=	7	+	4	3	9
xxxx0010	(3)		"	2	B	b	b	r			r	4	u	x	P	9
xxxx0011	(4)		#	3	C	c	c	a			u	9	7	e	e	w
xxxx0100	(5)		*	4	D	d	d	t			\	1	1	+	1	9
xxxx0101	(6)		%	5	E	e	e	u			.	*	*	1	3	0
xxxx0110	(7)		&	6	F	f	f	v			9	h	2	3	P	2
xxxx0111	(8)		'	7	G	g	g	w			7	+	7	7	9	4
xxxx1000	(1)		(	8	H	h	h	x			4	0	1	u	7	2
xxxx1001	(2)		)	9	I	i	i	w			6	7	1	u	1	4
xxxx1010	(3)		*	:	J	j	j	z			2	0	1	u	1	4
xxxx1011	(4)		+	:	K	k	k	(			*	7	1	0	1	4
xxxx1100	(5)		,	<	L	l	l	1			1	5	7	7	0	4
xxxx1101	(6)		-	=	M	m	m	)			1	2	1	u	1	4
xxxx1110	(7)		.	>	N	n	n	+			3	1	1	1	1	4
xxxx1111	(8)		/	?	O	o	o	+			1	1	7	1	1	4

### 3. QUALITY ASSURANCE SYSTEM

#### 3.1 Quality Assurance Flow Chart

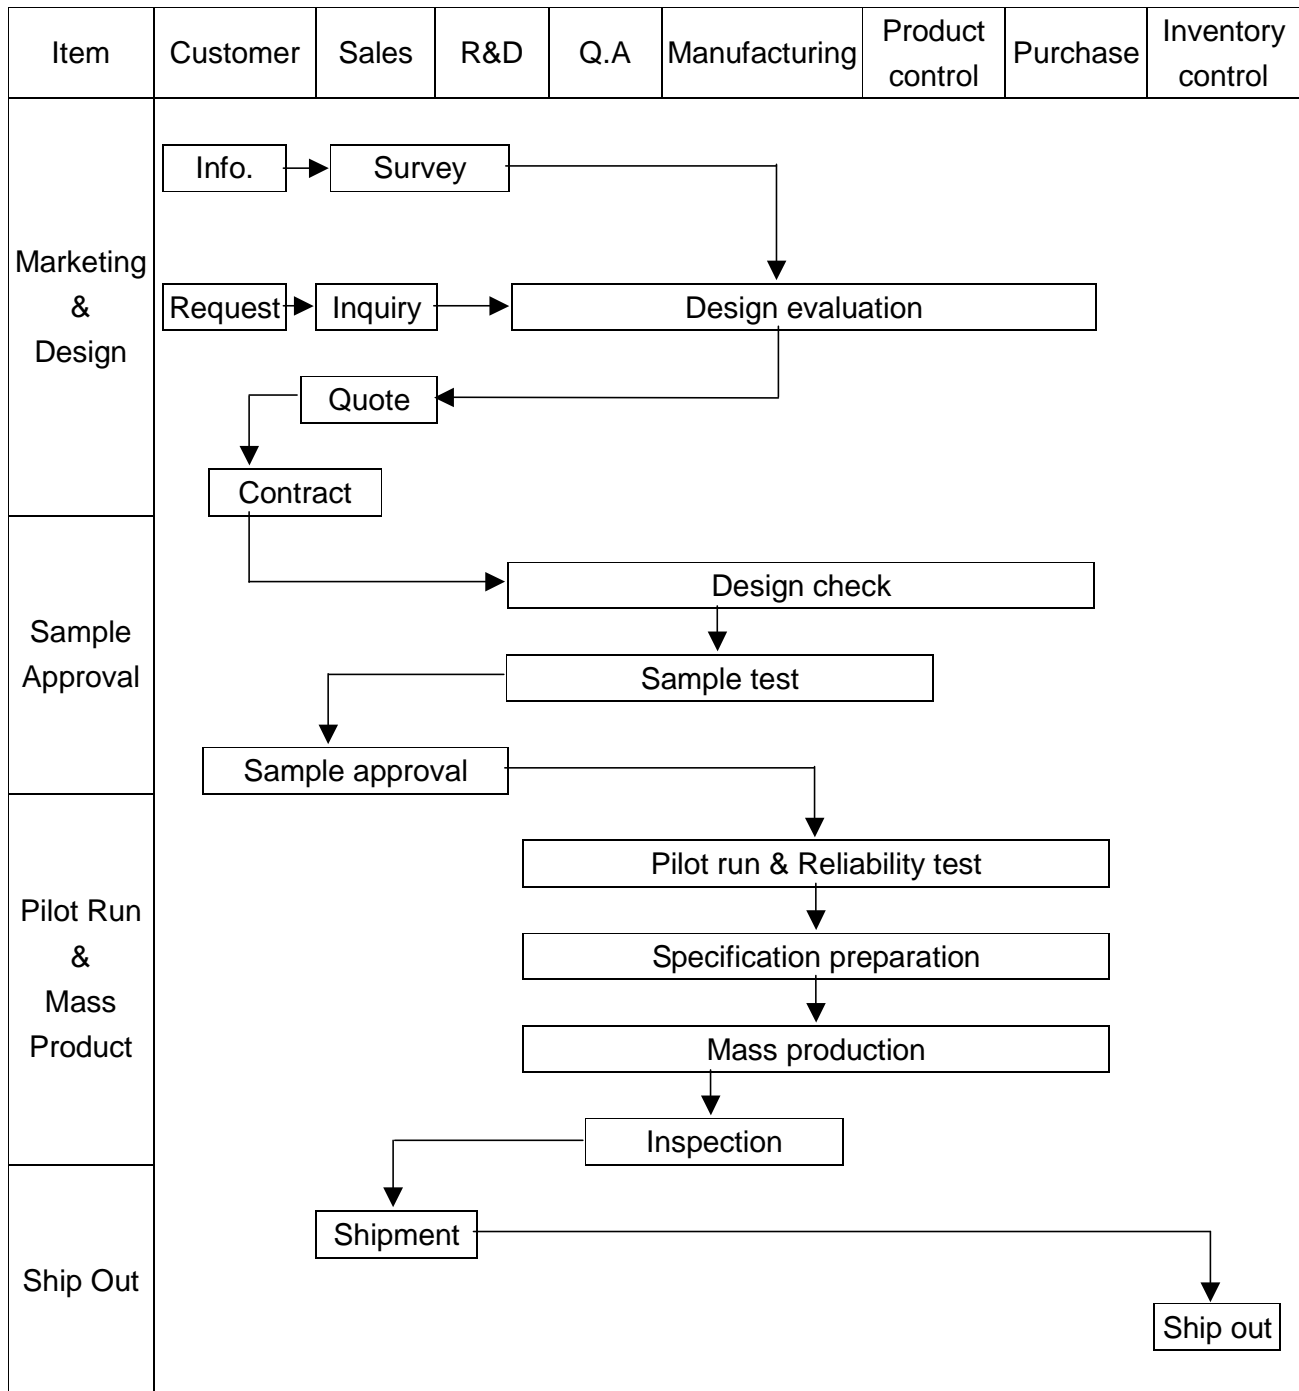

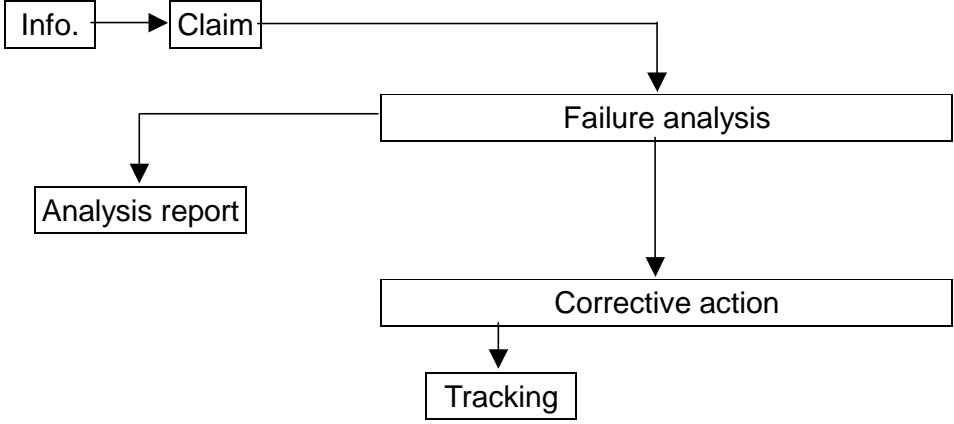

<p>Sales Service</p>	 <pre> graph TD     Info[Info.] --&gt; Claim[Claim]     Claim --&gt; Failure[Failure analysis]     Claim --&gt; Report[Analysis report]     Failure --&gt; Action[Corrective action]     Action --&gt; Tracking[Tracking]         </pre>
<p>Q.A Activity</p>	<ol style="list-style-type: none"> <li>1. ISO 9001 Maintenance Activities</li> <li>2. Process improvement proposal</li> <li>3. Equipment calibration</li> <li>4. Education And Training Activities</li> <li>5. Standardization Management</li> </ol>

### 3.2 Inspection Specification

Inspection Standard : MIL-STD-105E Table Normal Inspection Single Sampling Level II ◦

Equipment : Gauge ◦ MIL-STD ◦ Powertip Tester ◦ Sample ◦


IQC Defect Level : Major Defect AQL 0.65; Minor Defect AQL 1.0 ◦

FQC Defect Level : 100% Inspection ◦

OUT Going Defect Level : Sampling ◦


Specification :

N O	Item	Specification	Judge	Level
1	Part Number	Inconsistent with the P/N on the flow chart of production	N.G.	Major
2	Quantity	Inconsistent Q'TY with the flow chart of production	N.G.	Major
3	Electronic characteristics  $A = (L + W) \div 2$	Display short	N.G.	Major
		Missing line	N.G.	Major
		Dot missing $A > 1/2$ Dot size	N.G.	Major
		No function	N.G.	Major
		Out put data error	N.G.	Major
4	Appearance  $A = (L + W) \div 2$	Material difference with flow chart	N.G.	Major
		LCD Assembled in opposite direction	N.G.	Major
		Bezel assembled in opposite direction	N.G.	Major
		Shadow within LCD $V./A + 1.0$ mm	N.G.	Major
		Dirty particle $A > 0.4$ mm	N.G.	Minor
	Dirty particle ( Include scratch ◦ bubble )	Dirty particle length $> 3.0$ mm And $0.01\text{mm} < \text{Width} \leq 0.05\text{mm}$ ( Width $> 0.05\text{mm}$ Measure by area )	N.G.	Minor
		Without protective film	N.G.	Minor
		Conductive rubber over bezel	N.G.	Minor
5	PCB Appearance  $A = (L + W) \div 2$	Burned PCB	N.G.	Major
		Green paint stripped & visible circuit $A > 1.0$ mm ( Finish coat not counted in )	N.G.	Minor
		A particle across the circuit	N.G.	Minor
		Circuit split $> 1/2$ Circuit width	N.G.	Minor
		Any circuit risen	N.G.	Minor
		$0.2\text{mm} < \text{Tin ball area } A \leq 0.4\text{mm}$ And Q'TY $> 4$ Pieces	N.G.	Minor
		Tin ball area $A > 0.4\text{mm}$	N.G.	Minor

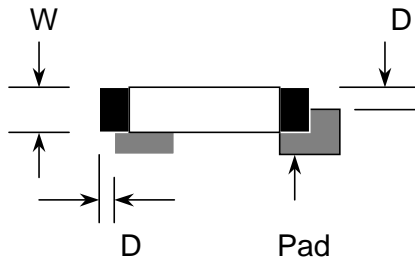N O	Item	Specification	Judge	Level	
6	Molding appearance $A=(L+W)\div 2$	Too soft : Shape by touch changed	N.G.	Major	
		Insufficient epoxy : IC circuit or IC pad visible	N.G.	Minor	
		Excessive epoxy : Diameter $> 20\text{mm}$ Or High $> 2.5\text{mm}$	N.G.	Minor	
		Pin hole through to IC and $A > 0.2\text{mm}$	N.G.	Minor	
7	Bezel appearance $A=(L+W)\div 2$	Angle between frame and TAB $> 45^\circ + 10^\circ$	N.G.	Minor	
		Electroplate strip A $> 1.0\text{mm}$ ( Top view only )	N.G.	Minor	
		Rust ( Top view only )	N.G.	Minor	
		Crack	N.G.	Minor	
8	Backlight electric characteristics $A=(L+W)\div 2$	Error backlight color	N.G.	Major	
		No function	N.G.	Major	
		Any LED dot no function	N.G.	Major	
		PIN soldering without tin $A > 1/2$ solder pad	N.G.	Minor	
		Solder PIN high $> 1.5\text{mm}$	N.G.	Minor	
9	LCD Appearance $A=(L+W)\div 2$	Polarize rise over V/A	N.G.	Minor	
10	Assembly parts $A=(L+W)\div 2$	Components mark unclearly	N.G.	Minor	
		Components' distance more than 0.7mm from the PCB	N.G.	Minor	
		Error position ,not in center $D > 1/4W$		N.G.	Minor
		Non- solder area $>$ Twice solder area			
		Flux area $A > 1/4$ solder area			
		Component broken	N.G.	Minor	

## 4. RELIABILITY TEST

### 4.1 Reliability Test Condition

No	Item	Test Condition	
1	High Temperature Storage	Storage at $80 \pm 2^{\circ}\text{C}$ 96~100 hrs surrounding temperature, then storage at normal condition 4hrs	
2	Low Temperature Storage	Storage at $-30 \pm 2^{\circ}\text{C}$ 96~100 hrs surrounding temperature, then storage at normal condition 4hrs	
3	High Temperature /Humidity Storage	1.Storage 96~100 hrs $60 \pm 2^{\circ}\text{C}$ , 90~95%RH surrounding temperature, then storage at normal condition 4hrs. (Excluding the polarizer). or 2.Storage 96~100 hrs $40 \pm 2^{\circ}\text{C}$ , 90~95%RH surrounding temperature, then storage at normal condition 4 hrs.	
4	Temperature Cycling	$-20^{\circ}\text{C} \rightarrow 25^{\circ}\text{C} \rightarrow 70^{\circ}\text{C} \rightarrow 25^{\circ}\text{C}$ $(30\text{mins}) (5\text{mins}) (30\text{mins}) (5\text{mins})$  10 Cycle	
5	Vibration	10~55Hz ( 1 minute ) 1.5mm X,Y and Z direction * (each 2hrs)	
6	ESD Test	Air Discharge: Apply 6 KV with 5 times discharge for each polarity +/-.	Contact Discharge: Apply 250V with 5 times discharge for each polarity +/-.
		Testing location: Around the face of LCD.	Testing location: 1.Apply to bezel. 2.Apply to Vdd, Vss.
7.	Drop Test	Packing Weight (Kg)	Drop Height (cm)
		0 ~ 45.4	122
		45.4 ~ 90.8	76
		90.8 ~ 454	61
		Over 454	46

## 5. PRECAUTION RELATING PRODUCT HANDLING

### 5.1 SAFETY

- 5.1.1 If the LCD panel breaks , be careful not to get the liquid crystal to touch your skin.
- 5.1.2 If the liquid crystal touches your skin or clothes , please wash it off immediately by using soap and water.

### 5.2 HANDLING

- 5.2.1 Avoid any strong mechanical shock which can break the glass.
- 5.2.2 Avoid static electricity which can damage the CMOS LSI—When working with the module , be sure to ground your body and any electrical equipment you may be using.
- 5.2.3 Do not remove the panel or frame from the module.
- 5.2.4 The polarizing plate of the display is very fragile. So , please handle it very carefully ,do not touch , push or rub the exposed polarizing with anything harder than an HB pencil lead (glass , tweezers , etc.)
- 5.2.5 Do not wipe the polarizing plate with a dry cloth , as it may easily scratch the surface of plate.
- 5.2.6 Do not touch the display area with bare hands , this will stain the display area.
- 5.2.7 Do not use ketonics solvent & aromatic solvent. Use with a soft cloth soaked with a cleaning naphtha solvent.
- 5.2.8 To control temperature and time of soldering is  $280\pm 10^{\circ}\text{C}$  and 3-5 sec.
- 5.2.9 To avoid liquid (include organic solvent) stained on LCM .

### 5.3 STORAGE

- 5.3.1 Store the panel or module in a dark place where the temperature is  $25^{\circ}\text{C} \pm 5^{\circ}\text{C}$  and the humidity is below 65% RH.
- 5.3.2 Do not place the module near organics solvents or corrosive gases.
- 5.3.3 Do not crush , shake , or jolt the module.

## **5.4 TERMS OF WARRANTY**

### **5.4.1 Applicable warrant period**

The period is within thirteen months since the date of shipping out under normal using and storage conditions.

### **5.4.2 Unaccepted responsibility**

This product has been manufactured to your company's specification as a part for use in your company's general electronic products. It is guaranteed to perform according to delivery specifications. For any other use apart from general electronic equipment , we cannot take responsibility if the product is used in medical devices , nuclear power control equipment , aerospace equipment , fire and security systems or any other applications in which there is a direct risk to human life and where extremely high levels of reliability are required.